

Product Data Sheet

# Indium6.3 Water-Soluble Solder Paste

## Benefits

- Excellent wetting and solder joint appearance
- Exceptional printing and response to pause
- Wide reflow profile window
- Outstanding slump resistance
- Low voiding
- Halogen-Free

## Alloys

Indium Corporation manufactures low oxide spherical powder composed of eutectic Sn/Pb and Sn/Pb/Ag in the industry standard type 3 mesh size (J-STD-006). Other non-standard mesh sizes are available upon request. The weight ratio of the flux/vehicle to the solder powder is referred to as the metal load and is typically in the range of 80-92% for standard alloy compositions.

## Standard Product Specifications

Alloy	Metal Load		Particle Size
	Printing	Dispensing	
Sn63/Pb37			25-45 µm
Sn62/Pb36/Ag2	89.5% (Type 3)	80-86% (Type 3)	0.001-0.0018"

## Packaging

Standard packaging for stencil printing applications includes wide-mouth 500g jars and 700g cartridges. For dispensing applications, 10cc and 30cc syringes are standard. Other packaging options may be available upon request.

## Storage and Handling Procedures

Refrigerated storage will prolong the shelf life of solder paste. The shelf life of **Indium6.3** is 4 months when stored at <10°C. When storing solder paste contained in syringes and cartridges, the packages should be stored with tip down.

Solder paste should be allowed to reach ambient working temperature prior to use. Generally, paste should be removed from refrigeration at least two hours before use. Actual time to reach thermal equilibrium will vary with container size. Paste temperature should be verified before use. Jars and cartridges should be labeled with date and time of opening.

## Material Safety Data Sheets

The MSDS for this product can be found online at <http://www.indium.com/techlibrary/msds.php>

## Placement

The high tack value of **Indium6.3** assures consistent component holding power. It allows high speed component placement operation, including use of tall components. Tack remains adequate for over 24 hours over a wide humidity range.

OVER→

## BELLCORE AND J-STD TESTS & RESULTS

Test	Result	Test	Result
<b>J-STD-004 (IPC-TM-650)</b>		<b>J-STD-005 (IPC-TM-650)</b>	
• Flux Type Classification	ORHO	• Typical Solder Paste Viscosity (Sn63, 89.5%, Type 3)	
• Halide Content (F, Cl, Br)	0.0%	Malcom (10 rpm),	1700 poise*
• SIR	Pass	• Typical Tackiness	40g*
• Wetting Test	Pass	• Slump Test	Pass
		• Solder Ball Test	Pass
		*Pending statistical validation	

All information is for reference only. Not to be used as incoming product specifications.

Form No. 98472 R2

[www.indium.com](http://www.indium.com)

[askus@indium.com](mailto:askus@indium.com)

ASIA: Singapore, Cheongju: +65 6268 8678  
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900  
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400  
 USA: Utica, Clinton, Chicago: +1 315 853 4900



## Indium6.3 Water-Soluble Solder Paste

### Printing

#### Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components — A 10-20% reduction of stencil aperture has significantly reduced or eliminated the occurrence of mid-chip solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine pitch components — A surface area reduction is recommended for apertures of 20 mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process dependent (5-15% is common).
- For optimum transfer efficiency and release of the solder paste from the stencil apertures, industry standard aperture and aspect ratios should be adhered to.

#### Printer Operation:

The following are general recommendations for stencil printer optimization for Indium6.3. Adjustments may be necessary based on specific process requirements:

- Solder Paste Bead Size: 20-25mm diameter
- Print Speed: 25-150mm/sec
- Squeegee Pressure: 0.018-0.027kg/mm of blade length
- Underside Stencil Wipe: Once every 10-25 prints or as necessary (dry wipe recommended)
- Solder Paste Stencil Life: >8 hrs. @ 20 to at least 70% R.H. & 22-28°C

### Wetting

**Indium6.3** exhibits excellent wetting on a wide variety of surface finishes, such as immersion tin, immersion silver, nickel/gold, palladium, alloy 42, HASL, and OSP, under both air and nitrogen reflow atmosphere. The solder joints yielded are very shiny and smooth, including those of ultra-fine-pitch components. **Indium6.3** has ultra-low voiding performance. Minimal voiding can be achieved with optimal process conditions.


### Cleaning

**Residue Cleaning:** **Indium6.3** flux residue is cleanable up to at least 72 hours after reflow and is best cleaned using DI water with a spray pressure of at least 60 psi and a temperature of at least 55°C. These parameters are a function of board complexity and cleaner efficiency.

**Stencil Cleaning:** This is best performed using an automated stencil cleaning system for both stencil and misprint cleaning to prevent extraneous solder particles. Most commercially available stencil cleaners and isopropyl alcohol (IPA) work well.

### Reflow

#### Recommended Profile:

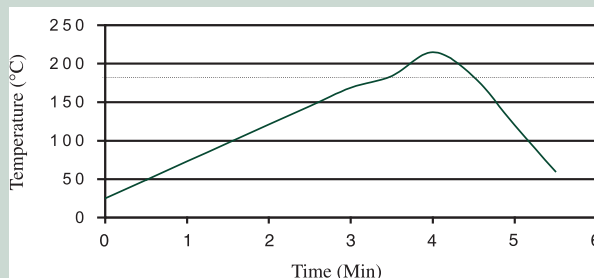

The profile shown here is designed for **Indium6.3** with Sn63/Pb37 and Sn62/Pb36/Ag2 under both air and nitrogen reflow atmosphere. It serves as a general guideline in establishing a reflow profile for these alloys.

#### Heating Stage:

A linear ramp rate of 0.5°- 2.0°C/second allows gradual evaporation of volatile flux constituents and helps minimize defects such as solder balling and/or beading and bridging resulting from hot slump. It also prevents unnecessary depletion of fluxing capacity when a high peak temperature and extended time above liquidus is used.

#### Liquidus Stage:

A peak temperature of 25°- 45°C (215°C shown) above the melting point of the solder alloy is needed to form a quality solder joint and achieve acceptable wetting due to the formation of an intermetallic layer. If the peak temperature is excessive, or the time above liquidus greater than the recommended 45-90 seconds, flux charring, excessive intermetallic formation and damage to the board and components can occur.

#### Cooling Stage:

A rapid cool down is desired to form a fine grain structure. Slow cooling will form a large grain structure, which typically exhibits poor fatigue resistance. The acceptable cooling range is 0.5°C-6.0°C/second (2.0°-6.0°C/second is ideal).

This product data sheet is provided for general information only. It is not intended, described which are sold subject exclusively to written warranties and limitations and shall not be construed, to warrant or guarantee the performance of the products thereon included in product packaging and invoices.

[www.indium.com](http://www.indium.com)

[askus@indium.com](mailto:askus@indium.com)

ASIA: Singapore, Cheongju: +65 6268 8678  
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900  
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400  
 USA: Utica, Clinton, Chicago: +1 315 853 4900



©2008 Indium Corporation

ISO 9001  
REGISTERED